


# EQUIPO SPLIT DUCTO

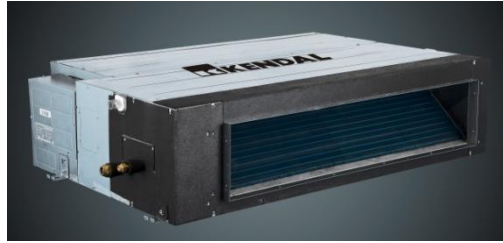

## DUCT INDOOR

Model name	MESP Duct Indoor		TSD-018MDS	TSD-024MDS	TSD-036MDS	TSD-048MDS	TSD-060MDS
			R410a	R410a	R410a	R410a	R410a
Power supply		V/Ph/Hz	220-240V~/50Hz/1P	220-240V~/50Hz/1P	380-415V~/50Hz/3P	380-415V~/50Hz/3P	380-415V~/50Hz/3P
Cooling	Capacity	Btu/h	18000	24000	36000	48000	60000
	Capacity	W	5300	7200	10550	14000	16119
	Input	W	1761	2351	3584	4560	5694
	Rated current	A	8,00	10,69	7,8	9,30	12,00
	EER	W/W	3,01	3,06	2,94	3,07	2,83
Heating	Capacity	Btu/h	20000	26500	40000	53000	60500
	Capacity	W	5900	7900	12000	16000	17731
	Input	W	1513	2388	3468	4446	4845
	Rated current	A	6,87	12,4	7,2	9,50	12,40
	COP	W/W	3,90	3,31	3,46	3,60	3,66
Indoor air flow (Hi/Me/Lo)		m <sup>3</sup> /h	1170/770/650	1400/950/800	1800/1500/1350	2100/1750/1550	2200/1800/1600
Indoor external static pressure (Hi)		Pa	70	70	80	100	100
Indoor noise level (Hi/Me/Lo)		dB(A)	43/35/32	46/43/41	46/44/42	47/44/42	47/45/43
Indoor dimension	Unit (WxHxD)	mm	920x570x210	920x570x270	1140x710x270	1200x800x300	1200x800x300
	Packing (WxHxD)	mm	1115x655x280	1115x655x340	1345x795x360	1405x890x390	1405x890x390
Indoor weight	Net	kg	23	25	35	45	47
	Gross	kg	28	30	40	50	52
Refrigerant	Type		R410A	R410A	R410A	R410A	R410A
Refrigerant pipe	Liquid side	mm	6,35	9,52	9,52	9,52	9,52
	Gas side	mm	12,70	15,88	19,05	19,05	19,05

Outdoor air flow		m <sup>3</sup> /h	2400/1850	4000/2450	4900/2750	6300/4650	6300/4650
Outdoor noise level		dB(A)	49/55	54/58	55/58	57/60	57/60
Outdoor dimension	Unit (WxHxD)	mm	780x605x290	900x650x310	900x805x360	1250x940x340	1250x940x340
	Packing (WxHxD)	mm	883x412x653	1015x720x425	1031x925x447	1365x1030x430	1365x1030x430
Outdoor weight	Net	kg	42	54	79	103	108
	Gross	kg	47	59	87	113	118